


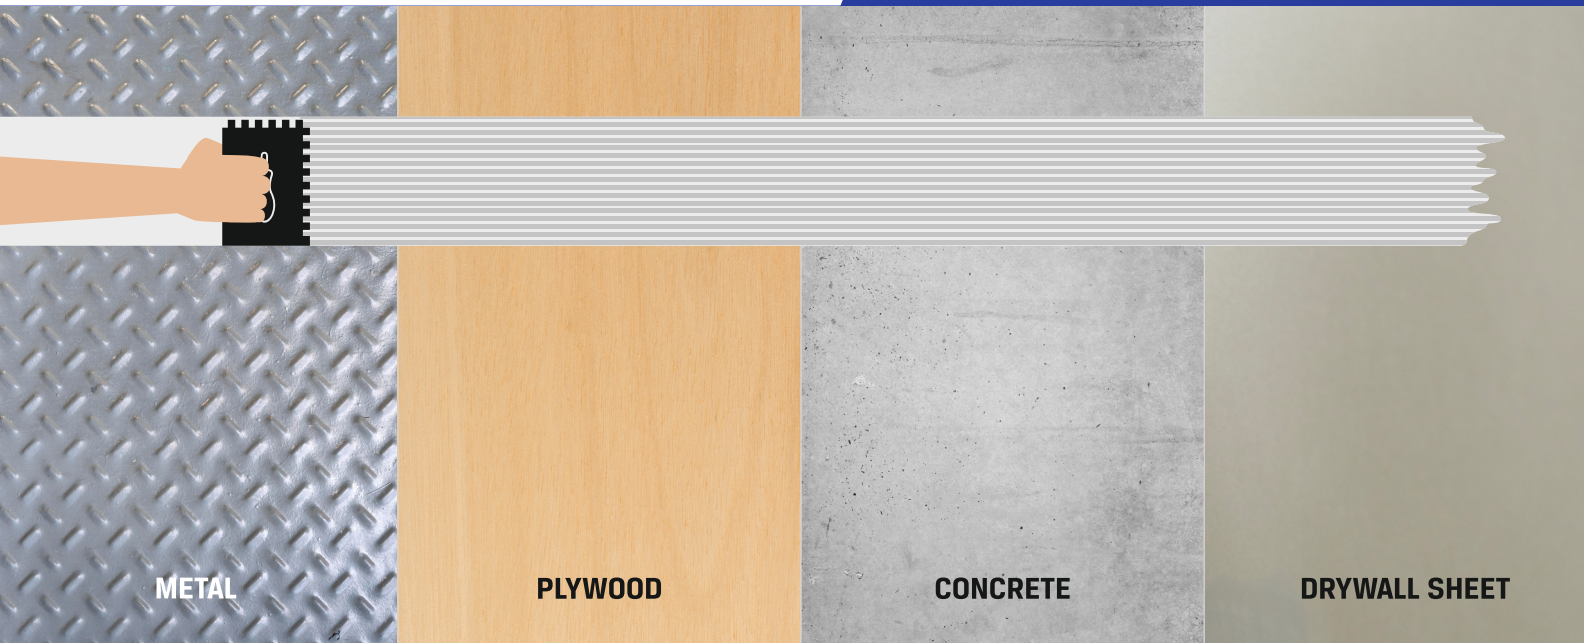

METAL

PLYWOOD

CONCRETE

DRYWALL SHEET




Features



High adhesive bond strength



Long open time



Flexible

JSW Tylfix Type 5 PU Lastic

PU ADHESIVE FOR CERAMIC TILES AND STONE MATERIAL

AREAS OF APPLICATION


JSW Tylfix Type 5 PU Lastic is Two-component, PU Resin Based, high-performance, polyurethane adhesives is an improved (2) reaction adhesive (R) classified as class R2T. It is a high performance, PU resin based multipurpose tile adhesive for fixing ceramic tiles marble, stone cladding and brick slips in interior or exterior situations.



Kitchen



Bathroom & Toilet



Commercial & Residential



Canteen & Pantry

7 BENEFITS

- Waterproof – immersion will not affect adhesion.
- Non-slip has excellent grab properties.
- Precision made.
- Forms a watertight barrier.
- High adhesive bond strength.
- Long open time.
- Flexible

BEST BEFORE

12 Months from the date of Manufacture.

Store under cover, out of direct sunlight and protect from extremes of temperature.

COLOUR AVAILABLE

Available in Grey & White colour

TECHNICAL SPECIFICATIONS

Properties	Results
Consistency	Thixotropic
Mixing Ratio, by weight (A:B)	4.4 : 0.6
Mix Density	1.5 Kg/Liter
Open Time	50 min. at 25°C
Pot Life	3-40 Mins at 25°C
Temperature resistance	- 20°C to 80°C
Ready to Light Foot Traffic	12 Hours
Ready to use	7 Days
Tensile Adhesion (EN 12003)	>2.0 MPa
Initial shear adhesion (EN 12003)	>2.6 MPa
Shear adhesion (water immersion) (EN 12003)	>2.0 MPa
Shear adhesion (thermal shock) (EN 12003)	>2.4 MPa
Deformability	Deformable

PACK SIZE

1 kg, 5 kg Bucket



World's No.1 Eco Friendly Cement Company

MARKETED BY: JSW Green Cement Pvt. Ltd.
Babukhan Millenium Centre, 6-3-1099/1100, No. 702, Block-A, Somajiguda, Hyderabad,
Telangana, India, Pincode - 500 082.

Email: info@jswcement.in | Website: www.jswcement.in | Toll free - 18002662661

SCAN HERE FOR TDS



SCAN HERE



JSW TYLFIX TYPE 5 PU LASTIC

TILE ADHESIVE, GROUT & CLEANER