



FLOORSCRETE



## Features



High compressive strength



Excellent adhesion




Ready to use

# JSW FLOORSCRETE

Ready to use Floor Screed

## AREAS OF APPLICATION

**JSW Floorscrete** is ideal as a final protective levelling screed over waterproofing coating, warehouse, parapet and work shop floors and as an underlayment for marble as well as large tile floorings.

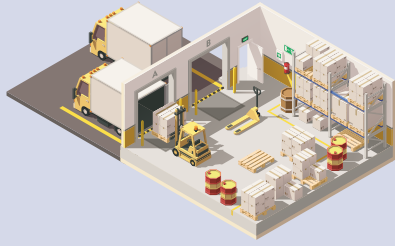

warehouse



workshop floors

## 7 BENEFITS

- Excellent adhesion
- High compressive strength
- Faster screed applications from 20 mm to 60 mm thickness in single layer
- Ready for subsequent application after 48 hrs.
- Single Component
- Ready to use
- Well graded good quality sand and fillers

## BEST BEFORE

- Floor Screed has a shelf life of 12 months from the date of manufacture.

## COVERAGE

- Coverage For 25 Kg Bag - 11.25 - 12.5 Sqft @ 12 Mm thickness

## TECHNICAL SPECIFICATIONS

Properties	Results
Fresh wet density	2250-2350 kg/m <sup>3</sup>
Pot life	1 hour
Compressive strength @ 28 days	Min 25 N/mm <sup>2</sup>
Curing	3-5 days 3 times a day

## PACK SIZE

25 kg



# JSW Cement

World's No.1 Eco Friendly Cement Company

MARKETED BY: JSW Green Cement Pvt. Ltd.  
Babukhan Millenium Centre, 6-3-1099/1100, No. 702, Block-A, Somajiguda, Hyderabad,  
Telangana, India, Pincode - 500 082.

Email: [info@jswcement.in](mailto:info@jswcement.in) | Website: [www.jswcement.in](http://www.jswcement.in) | Toll free - 18002612661

SCAN HERE FOR TDS



SCAN HERE



FLOORSCRETE

MORTAR